


WestLab Audio

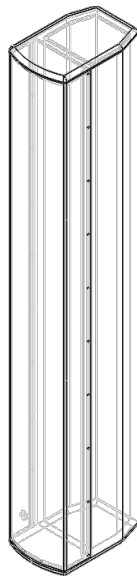

Product Data

6x5" Column Speaker

Series: LABSTREAK
Model: LABSTREAK p (passive)

Dimensions H 1160 x W 150 x D 225 mm
Local Box H - x W - x D mm
Export Box H - x W - x D - mm
Net weight 19,5 kg
Export boxed - kg

| | |
|--|--|
| Power Handling (RMS/Program) | LF 500/1000 W HF 240/1000 W |
| Nominal Impedance | 3,3 Ohm |
| Frequency Range (-10dB) | 58 Hz - 35 kHz |
| Crossover Frequency | 1200 Hz |
| Directivity horizontal | 90° / 120° optional mechanical adjustment) |
| Directivity vertical | 8° / up to 18° F.I.R. beam steering |
| Maximum Output | LF 133dB @ 1000 W HF 150dB @ 1000 W |
| Low Frequency Driver Chassis type | 6 x ultra low distortion low midrange driver |
| Low Frequency Driver Magnet | Neodymium |
| Low Frequency Driver Chassis diameter | 5" / 128 mm |
| Low Frequency Driver Voicecoil diameter | 1,5" / 38 mm |
| High Frequency Driver Chassis type | 3 x planar wave driver |
| High Frequency Driver Magnet | Neodymium |
| High Frequency Driver Chassis diameter | 4" x 1" / 101,6 x 25,4 mm |
| High Frequency Driver Voicecoil diameter | 1,75" / 44,4 mm |